



KRISPOL FACADE GARAGE DOORS



KRISPOL FACADE GARAGE DOORS

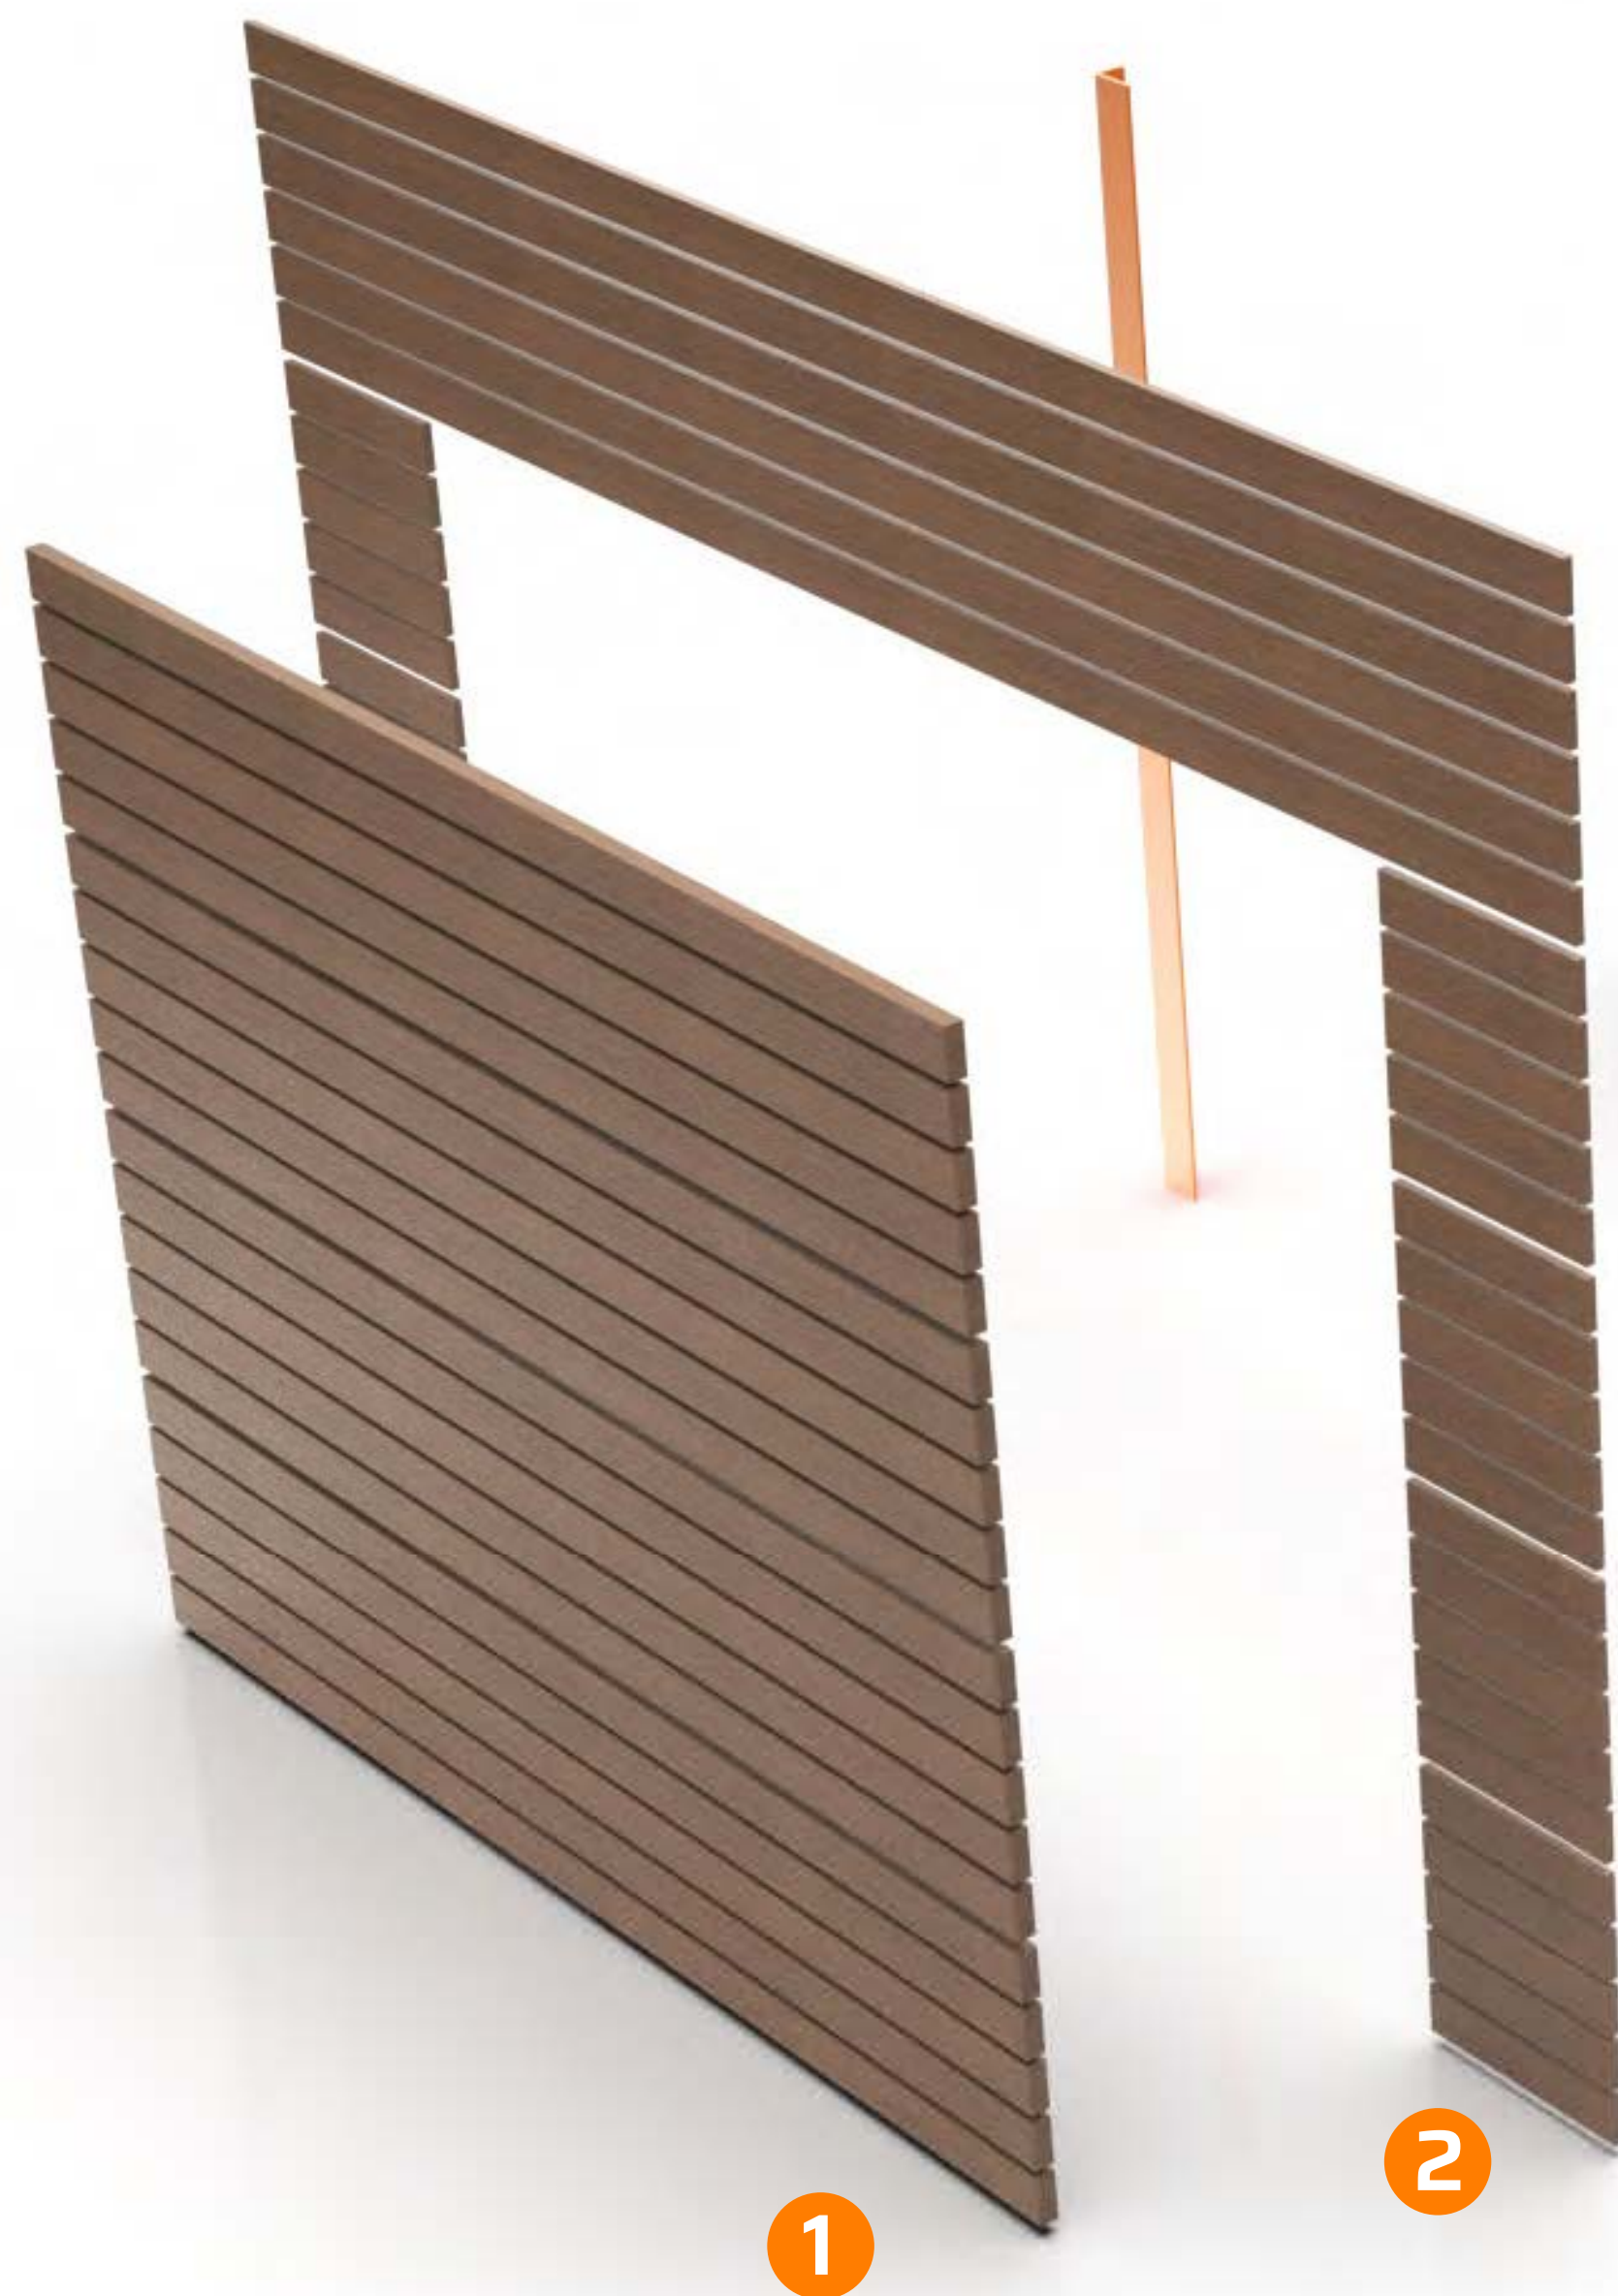

- 1 – Door facade cladding,
max. thickness 42 mm
– to be provided by the Client
- 2 – Building facade cladding,
max. thickness 20 mm
– to be provided by the Client
- 3 – The substructure for the installation
of the door, 120 x 80 x 8 cm angle
– to be provided by the Client
- 4 – KRISPOL sectional door
with LHR track system

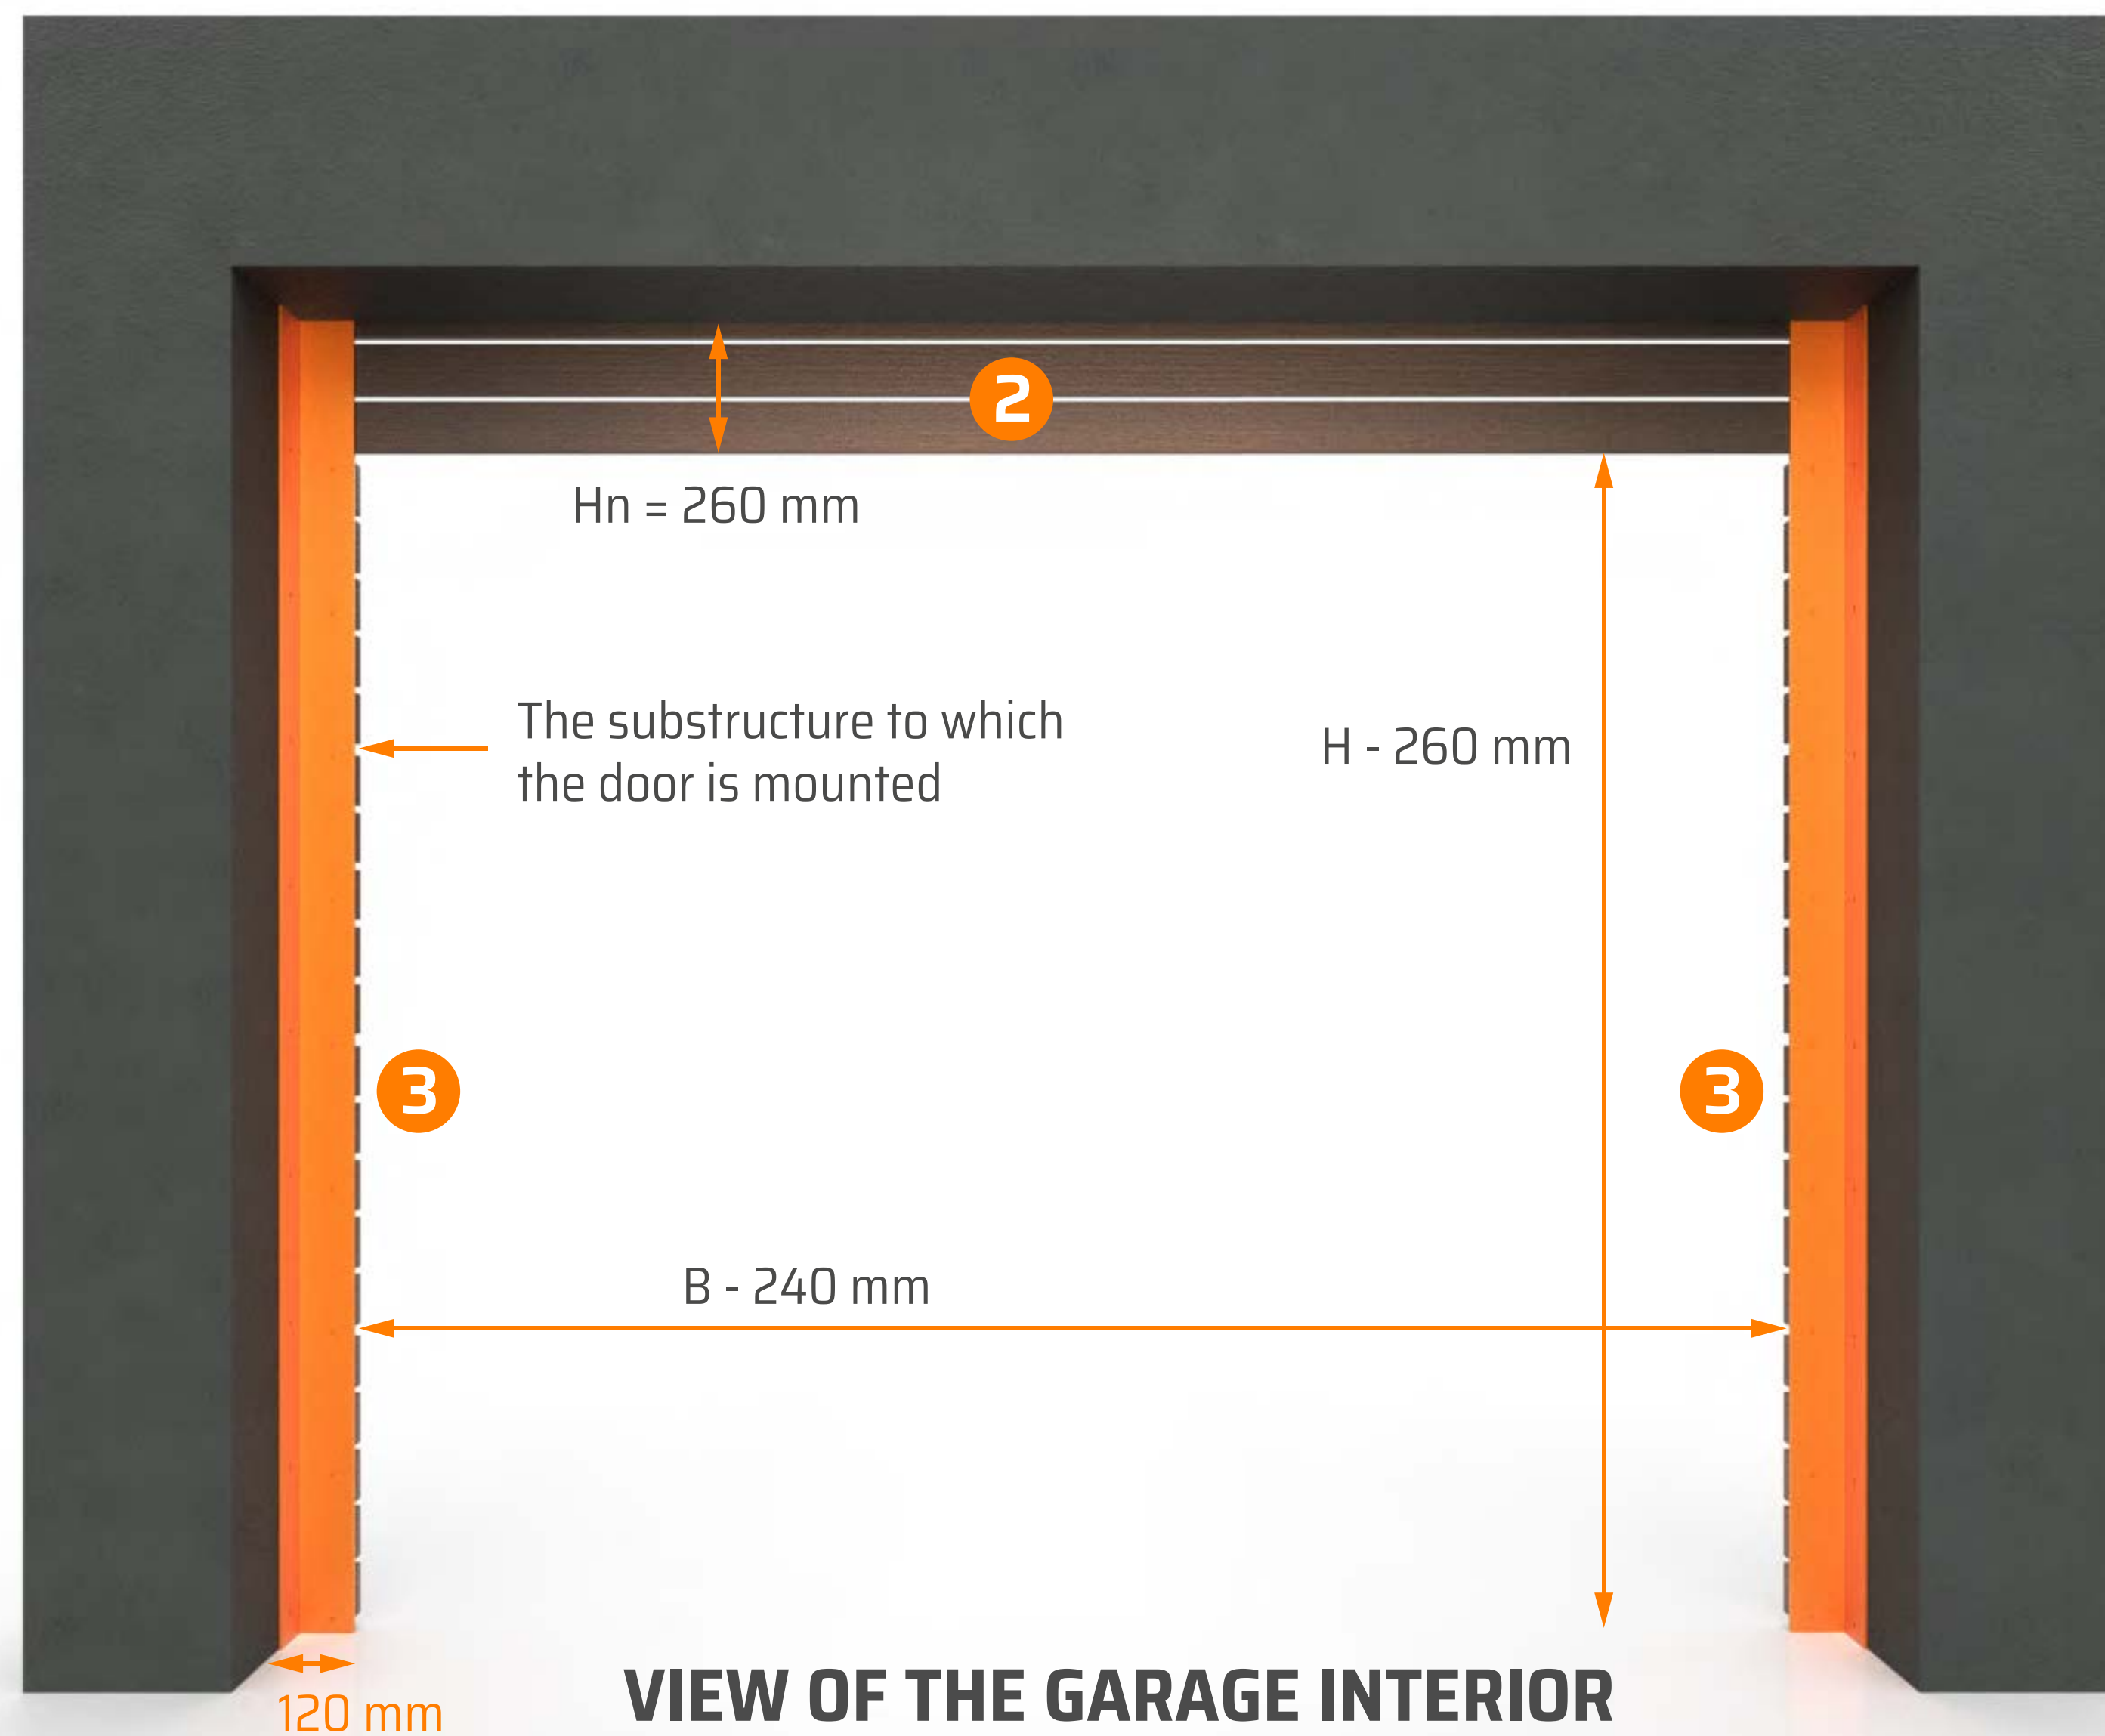

- 2** – Building facade cladding, max. thickness 20 mm
– to be provided by the Client
- 3** – The substructure for the installation of the door, 120 x 80 x 8 cm angle
– to be provided by the Client

